
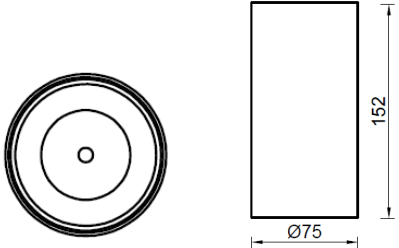


BASIC INFORMATION							
Product Name	LLD.CAN.SURFACE MOUNTED.WHI.40D.3CCT LLD.CAN.SURFACE MOUNTED.BLK.40D.3CCT	Item code	LLD.CAN.SURFACE MOUNTED.WHI.40D.3 CCT LLD.CAN.SURFACE MOUNTED.BLK.40D.3 CCT				
Feature	LED Surfaced Mounted downlight, Tri-color CCT change, IP65 waterproof						
Product Material	Aluminum						
Product Colour	White/black						
Lamp Type	Fixed LED						
EEl (Energy Efficiency Index)	N/A						
							
				ELECTRICAL DATA			
				Nominal voltage	AC220-240V	Nominal current	0.07A
				Nominal power	15W	Power Consumption	15W
				Operating frequency	50/60Hz	Lamp power factor	>0.9
				Classification of Insulation	Class II	Dimmable	Non dimmable
				Driver / Trasfo. Data	220~240Vac~50/60Hz		
LIGHT TECHNICAL DATA							
LED Brand	Epistar COB	No. of LED	1pc				
LED operating input current	350mA	LED power (total)	15W				
Colour temperature	3000K/4000K/5700K	Colour rendering index Ra	>80				
Luminous flux (lumen) <i>(for directional lamps: 90° cone)</i>	1200-1350lm	Equivalent wattage	75W				
Nominal beam angle (°)	40°	Luminous peak intensity	N/A				
MECHANICAL INFORMATION							
Size on lamp (mm)							
Mounting	LED Surfaced Mounted Downlight	Tiltable Angle (if applicable)	N/A				
IP Class (if applicable)	IP65 at front	Rotation Angle(if applicable)	N/A				





Showroom:353 Settlement Road Thomastown VIC 3074

Phone: (03) 8336 1888 Fax: (03) 8336 1666 Email: info@lightsandlamps.com.au



Showroom:353 Settlement Road Thomastown VIC 3074

Phone: (03) 8336 1888 Fax: (03) 8336 1666 Email: info@lightsandlamps.com.au